

NOTES: FOR ADDITIONAL DETAILS, PLEASE CONTACT VP CUSTOMER SERVICE DIMENSIONS MARKED ARE CONTROL DIMENSIONS

	REVISIONS								
REV.	DESCRIPTION	DATE	APPROVED						
A	INITIAL RELEASE	01-08-14	S.N.R						

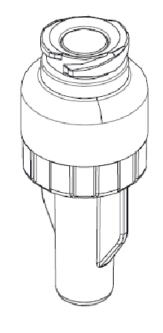

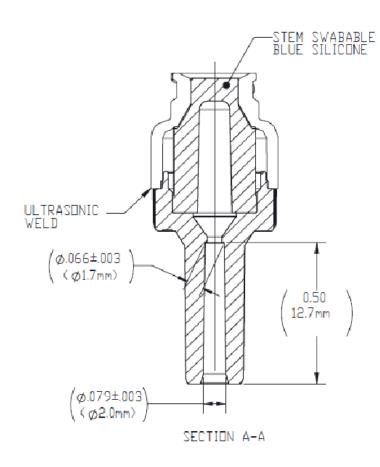


NOTES:

- 1. CLEAR POLYCARBONATE
- 2. CRITICAL DIMENSIONS ARE CIRCLED AND ARE SUBJECT TO INSPECTION.
- 3. DIMENSIONS IN PARENTHESES ARE REFERENCE ONLY.
- 4. ALL DIMENSIONS ARE IN INCHES, WITH NOMINAL DIMENSION IN METRIC BELOW.
- 5. LUER COMPATABLE WITH ISO594-2.

VALVE SPECIFICATION:

PRIMING VOLUME: 0.12 ML (FOR ENTIRE CONNECTOR).
BACK PRESSURE: > 30 PSI, REF. (2.1 BAR). (40 PSI NOMINAL) .
FLOW RATE: 360 ML/ MIN. (21,000 ML/HR) @ 1 PSI, (0.07 BAR) (30 INCHES HEAD HEIGHT).
BIOCOMPATABILITY: PASSES ISO 10993, PART 1.
MATERIALS: ALL MATERIALS ARE GAMMA RESISTANT, MEET USP CLASS VI; ARE DEHP, AND LATEX FREE.
POTENTIAL STERILIZATION: ETO; AND GAMMA, BASED ON RAW MATERIAL SPECIFICATIONS.

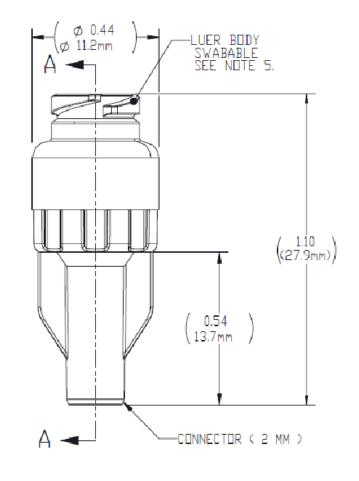

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		VALUE PLASTICS, INC							
FRACTIONS DECIMAL ANGULAR ± .XX ±.01 ± 1° .XXX ±.005 .XXXX ±.005 .XXXX ±.001 DO NOT SCALE DRAWING		PART NUMBER: NVF20PC							
		DESCRIPTION:							
		Tube	Tube End Port 2.0mm, Clear Polycarbonate						
DRAWN BY:	DATE:	SIZE:	SCALE:	VER:	DWG. NO.				REV
Jonathan Mayer	1/8/2014	В	NTS		1027	680			А
MANAGER: Ravi Narayanan									
		0	2011	VALUE	E PLASTIC	CS, INC	SHEET:	1 OF 1	

FOR REFERENCE ONLY